SYSTEM SPECIFICATION

# Xerox® 9-Series CX950/951/952/953 Color Multifunction Printers

With the new A3 CX950/951/952/953 Color Multifunction Printers (MFPs), you get reassuring versatility, sustainability-focused design, and surprising simplicity from such sophisticated technology. Boost your productivity with vivid prints – up to 55 pages per minute*. Intuitively navigate the 10.1-inch color touchscreen and save time with single-pass two-sided scanning.






xerox™

**SYSTEM SPECIFICATION**
Xerox® 9-Series
CX950/951/952/953 Color Multifunction Printers



| SYSTEM SPECIFICATION | | | | |
|---|---|---|---|---|
| | **CX950** | **CX951** | **CX952** | **CX953** |
| Print Technology | Color Laser | | | |
| Function | Color Copying, Color Printing, Color Scanning, Fax (optional) | | | |
| Workgroup Size | Medium Workgroup | | Large Workgroup | |
| Display | 10.1-inch (25.6 cm) e-Task color touch screen | | | |
| Processor Speed | Quad Core, 1.2 GHz | | | |
| Memory | 4GB Standard, 4GB Maximum | | | |
| Storage Drive | 128 GB Intelligent Storage Drive included; 500 GB Magnetic Hard Disk (optional) | | | |
| Maximum Monthly Duty Cycle[3] | Up to 100,000 pages per month | Up to 100,000 pages per month | Up to 200,000 pages per month | Up to 270,000 pages per month |
| Recommended Monthly Page Volume[4] | 4,000 - 20,000 pages | 4,000 - 20,000 pages | 7,000 - 50,000 pages | 7,000 - 50,000 pages |


| PRINT | | | | |
|---|---|---|---|---|
| | **CX950** | **CX951** | **CX952** | **CX953** |
| Print Speed (Letter, Black)[1] | Up to 25 ppm | Up to 35 ppm | Up to 45 ppm | Up to 55 ppm |
| Print Speed (Letter, Color)[1] | Up to 25 ppm | Up to 35 ppm | Up to 45 ppm | Up to 55 ppm |
| Print Speed (Letter, Black) Duplex[1] | Up to 25 ppm | Up to 35 ppm | Up to 45 ppm | Up to 55 ppm |
| Print Speed (Letter, Color) Duplex[1] | Up to 25 ppm | Up to 35 ppm | Up to 45 ppm | Up to 55 ppm |
| Time to First Page (Black) | As fast as 6 seconds | | | |
| Time to First Page (Color) | As fast as 7.1 seconds | | | |
| Duplex (2-sided) Printing | Integrated Duplex | | | |
| Print Resolution, Black | 1200 x 1200 dpi, 4800 Color Quality | | | |
| Print Resolution, Color | 1200 x 1200 dpi, 4800 Color Quality | | | |
| Printable Area | 0.16 inches of the top, bottom, right and left edges (within) | | | |
| Printer Languages (Standard) | PCL 6 Emulation, Personal Printer Data Stream (PPDS), PostScript 3 Emulation, Direct Image, PDF 1.7 emulation, PCLm, PCL 5 Emulation | | | |
| Fonts and Symbol Sets | 39 scalable PPDS fonts, 5 PPDS bitmap fonts, 2 PCL 5/6 bitmap fonts, 163 scalable PostScript fonts, 94 scalable PCL 5/6 fonts | | | |

| COPY | | | | |
|---|---|---|---|---|
| | **CX950** | **CX951** | **CX952** | **CX953** |
| Copy Speed (Letter, Black)[1] | Up to 25 ppm | Up to 35 ppm | Up to 45 ppm | Up to 55 ppm |
| Copy Speed (Letter, Color)[1] | Up to 25 ppm | Up to 35 ppm | Up to 45 ppm | Up to 55 ppm |
| Copy Speed (Letter, Black) Duplex[1] | Up to 25 ppm | Up to 35 ppm | Up to 45 ppm | Up to 55 ppm |
| Copy Speed (Letter, Color) Duplex[1] | Up to 25 ppm | Up to 35 ppm | Up to 45 ppm | Up to 55 ppm |
| Time to First Copy (Black) | As fast as 6.6 seconds | | | |
| Time to First Copy (Color) | As fast as 8 seconds | | | |
| Warm-up time (from off) | As fast as 60 seconds | | | |
| Reduce/Enlarge Range | 25 – 400% | | | |



# **Xerox® 9-Series** CX950/951/952/953 Color Multifunction Printers

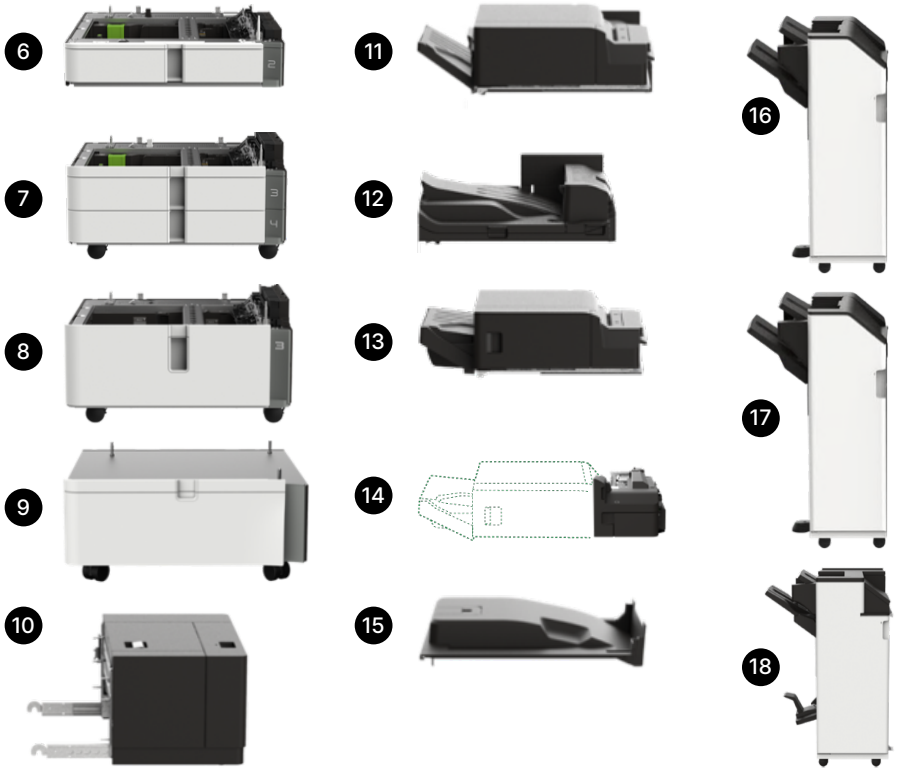


1 **Multifunction product with 10.1-inch (25.5 cm) touch screen**
33.8 x 23.3 x 26.0 in.
858 x 592 x 660 mm

2 **200 Sheets, 200 images per minute duplex (DADF) scanner.**

3 **500-Sheet output bin**
Dimensions included as part of base model

4 **150-Sheet multipurpose feeder**
Dimensions included as part of base model

5 **550-Sheet tray**
Dimensions included as part of base model

6 **550-Sheet Tray or 550-Sheet Special Media Tray**
6.4 x 23.1 x 25.6 in.
163 x 587 x 649 mm

7 **2 x 550-Sheet Tray**
12.4 x 23.1 x 25.6 in.
314 x 587 x 649 mm

8 **2000-Sheet Tandem Tray - Letter**
12.4 x 23.1 x 25.6 in.
314 x 587 x 649 mm

9 **Cabinet**
9.7 x 23.1 x 26.0 in.
247 x 587 x 660 mm

10 **1500-Sheet High-Capacity Tray**
11.4 x 13.5 x 21.4 in.
290 x 342 x 545 mm

11 **Paper Transport**
5.6 x 16.2 x 18.3 in.
143 x 412 x 466 mm

12 **Folding Paper Transport**
7.2 x 24.1 x 21.9 in.
184 x 612 x 555 mm

13 **500-Sheet Internal Staple Finisher**
5.9 x 21.5 x 20.6 in.
150 x 546 x 523 mm

14 **Hole Punch Kit for 500-Sheet Internal Staple Finisher**
5.9 x 6.7 x 21.6 in.
150 x 170 x 550 mm

15 **Offset Stacker**
4.2 x 16.5 x 19.3 in.
107 x 420 x 489 mm

16 **1250-Sheet Staple 2/3 Hole Punch Finisher**
39.2 x 22.6 x 24.0 in.
995 x 575 x 610 mm

17 **1250-Sheet Staple Finisher**
39.2 x 22.6 x 24.0 in.
995 x 575 x 610 mm

18 **2250-Sheet Booklet Staple 2/3 Hole Punch Finisher**
39.2 x 25.6 x 24.1 in.
995 x 650 x 613 mm

● **Standard** ● **Optional**

- You can install one 550-Sheet tray or one Special media tray.
- You can install one 2x550-Sheet tray, one 2,000-Sheet tandem tray or one Cabinet, but you must also install one 550-Sheet tray or Special media tray above it.
- You can install one 1,500-Sheet high-capacity tray, but you must install one 2x550-Sheet tray or one 2,000-Sheet tandem tray beside it.
- You can install one 500-Sheet staple finisher, one Offset stacker or one Folding paper transport unit.
- You can install one Hole punch kit for 500-Sheet staple finisher, but you must install it with a 500-Sheet staple finisher 2025. MFPs manufactured prior to May 2025 need a top rear cover to complete installation. The Hole punch kit requires firmware version 25 or later.
- You can install one 1,250-Sheet staple hole punch finisher, one 1,250-Sheet staple finisher, or one 2,250-Sheet booklet staple hole punch finisher, but you must also install a Paper transport unit or Folding paper transport unit, one 550-Sheet tray, and one 2x550-Sheet tray or one 2,000-Sheet tandem tray or one Cabinet. The 1,250-Sheet staple finisher requires firmware version 25 or later.

**SYSTEM SPECIFICATION**
Xerox® 9-Series
CX950/951/952/953 Color Multifunction Printers



## SCAN

| | CX950 | CX951 | CX952 | CX953 |
|---|---|---|---|---|
| A4/Ltr Simplex Scan Speed (Black) | Up to 100/100 images per minute | | | |
| A4/Ltr Simplex Scan Speed (Color) | Up to 100/100 images per minute | | | |
| A4/Ltr Duplex Scan Speed (Black) | Up to 200/200 images per minute | | | |
| A4/Ltr Duplex Scan Speed (Color) | Up to 200/200 images per minute | | | |
| Scan Area, Maximum | 11.69 x 17.0 inches | | | |
| ADF Scan | DADF (single pass Duplex) | | | |
| Scanner Type | Flatbed scanner with automatic document feeeder, multifeed detection, and OCR | | | |
| Scan Resolution, Enhanced | Up to 600 x 600 dpi | | | |
| Scan Resolution, Optical | Up to 600 dpi | | | |
| Scan File Formats (Send as) | JPEG, JPG, PDF, Secure PDF, TIFF, Archival PDF (A-1a, A-1b), Searchable PDF, TXT, RTF, DOCX, Twain driver | | | |
| Scan Destinations | e-mail, FTP, USB Flash drive, USB or Network connected computer | | | |

## PAPER HANDLING

| | CX950 | CX951 | CX952 | CX953 |
|---|---|---|---|---|
| Included Paper Handling | 550-Sheet Tray, 150-Sheet Multipurpose Feeder, 500-Sheet Output Bin | | | |
| Optional Paper Handling | 550-Sheet Tray, Offset Stacker, 500-Sheet Staple Offset Finisher, 2 x 550-Sheet Tray, 2,000-Sheet Tandem Tray, Cabinet, 1,500-Sheet High-Capacity Tray, Paper Transport Unit, Folding Paper Transport Unit, 1,250-Sheet Staple Hole Punch Finisher, 1,250-Sheet Staple Finisher, 2,250-Sheet Booklet Staple Hole Punch Finisher | | | |
| Paper Input Capacity, Standard | Up to 700 pages 20 lb bond or 75 gsm | | | |
| Paper Input Capacity, Maximum | Up to 4,750 pages 20 lb bond or 75 gsm | | | |
| Paper Output Capacity, Standard | Up to 500 pages 20 lb bond or 75 gsm | | | |
| Paper Output Capacity, Maximum | Up to 2,650 pages 20 lb bond or 75 gsm | | | |
| Paper Weight Range Supported – Standard Tray | 16 lb bond to 80 lb bond/60 gsm to 300 gsm | | | |
| Paper Weight Range Supported – Special Media Tray | Supports large, heavy, and smooth labels, and cardstock. Also supports GHS labels, Monroney labels, and glossy cardstock weighing over 200 gsm. Supports up to 40 mm stack height. May be used with the 2x550-sheet Tray, the 2,000-sheet Tandem Tray and the 1,500-sheet High-Capacity Tray | | | |
| Paper Weight Range Supported – Multipurpose Feeder | 16 lb bond to 80 lb bond/60 gsm to 300 gsm | | | |
| A3/11 x 17 | Yes | | | |
| ADF | 200-Sheet Automatic Document Feeder | | | |
| ADF Paper Input Capacity | Up to 200 pages 20 lb bond or 75 gsm | | | |
| ADF Paper Weights | 14 lb bond to 40 lb bond/50 gsm to 150 gsm | | | |
| Finishing Option | Yes | | | |
| Finishing Functions | Offset stacking, Stapling, Hole punching | | | |
| Number of Paper Inputs, Standard | 2 | | | |
| Number of Paper Inputs, Maximum | 6 | | | |
| Media Types Supported | Card Stock, Envelopes, Glossy Paper, Labels, Plain Paper, Vinyl Labels, Refer to the Paper & Specialty Media Guide | | | |
| Media Sizes Supported | 10 Envelope, 7 3/4 Envelope, 9 Envelope, A3, A4, A5, B5 Envelope, C4 Envelope, C5 Envelope, DL Envelope, Hagaki Card, Executive, Folio, JIS-B4, JIS-B5, Ledger, Legal, Letter, Statement, Oficio, A6, SRA3, 12 x 18” | | | |

**SYSTEM SPECIFICATION**
Xerox® 9-Series
CX950/951/952/953 Color Multifunction Printers



## CONNECTIVITY

| | CX950 | CX951 | CX952 | CX953 |
|---|---|---|---|---|
| Standard Ports | USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), 802.11a/b/g/n/ac + Apple iBeacon | | | |
| Optional Local Ports | Internal RS-232C serial, Internal 1284-B Bidirectional Parallel | | | |
| Optional Network Ports | MarkNet N8230 Fiber Ethernet Print Server | | | |
| Direct USB | Yes | | | |
| Ethernet Network | Yes | | | |
| WiFi/WiFi Direct | Yes | | | |
| Wireless Network | WPA2™ - Personal, WPA™ and WPA2™ - Personal, 802.1x Authentication: MD5, MSCHAPv2, LEAP, PEAP, TLS, TTLS | | | |
| Network Protocol Support | TCP, UDP, IPSEC w/ IPv4, IPSEC w/ IPv6, ICMP, IGMP, IPv4, IPv6 | | | |
| Network Printing Methods | Direct IP (Port 9100), Enhanced IP (Port 9400), FTP, IPP 1.0, 1.1, 2.0 (Internet Printing Protocol), Microsoft Web Services WSD, Pull Printing, Thin Print, LPR | | | |
| Network Management Protocols | WINS, APIPA (AutoIP), DHCP, DNS, DDNS, mDNS, ARP, BOOTP | | | |
| Network Security | SNMPv3, 802.1x Authentication: MD5, MSCHAPv2, LEAP, PEAP, TLS, TTLS, Certificate Management, SSL Cipher Configuration, TCP/UDP Port Access Control, Security Port Lockdown, TCP Restricted Server List, IPSEC Support (IPv4/IPv6) | | | |

## OPERATING SYSTEM SUPPORT

| | CX950 | CX951 | CX952 | CX953 |
|---|---|---|---|---|
| Apple Operating Systems Supported | Support is provided through AirPrint and AirScan only | | | |
| Citrix MetaFrame | Microsoft Windows Server 2012 R2 Datacenter Edition running Citrix XenApp 7.5, 6, 7, 8, 9, 11, 12, 13, 14, 15, 16; Microsoft Windows Server 2012 Datacenter Edition running Citrix XenApp 7.5, 6, 7, 8, 9, 11, 12, 13, 14, 15, 16; Microsoft Windows Server 2012 Foundation running Citrix XenApp 6.0, 6.5; Microsoft Windows Server 2012 Essentials running Citrix XenApp 6.0, 6.5; Microsoft Windows Server 2012 Standard running Citrix XenApp 6.0, 6.5 | | | |
| Linux Operating Systems Supported | Ubuntu 20.04, Debian 10, SUSE Linux Enterprise Server 12 SP5, OpenSUSE 15.2, Debian 11, Ubuntu 22.04, Fedora 36, Fedora 37, SUSE Linux Enterprise Server 15 SP4, OpenSUSE 15.4, Red Hat Linux 8.7, Red Hat Linux 9.1 | | | |
| Microsoft Windows Operating Systems Supported | Windows 7, Windows 7 x64, Windows 8, Windows 8 x64, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, Windows Server 2016, Windows Server 2019, Windows Server 2022, Windows 11 | | | |
| Novell Operating Systems Supported | Novell NetWare 6.5 Open Enterprise Server; Novell Open Enterprise Server 2 (SP3) on SuSE Linux Enterprise Server 10 SP4 (x86 and x64); Novell Open Enterprise Server 11 (SP3) on SuSE Linux Enterprise Server 11 SP4 (x86 and x64); Novell Open Enterprise Server 11 (SP3) on SuSE Linux Enterprise Server 12 SP1 (x86 and x64); Novell Open Enterprise Server 15 (SP1) on SuSE Linux Enterprise Server 11 SP4 (x86 and x64) | | | |
| Other Operating Systems Supported | Virtually any platform supporting TCP/IP | | | |

## SUPPLIES

| | CX950 | CX951 | CX952 | CX953 |
|---|---|---|---|---|
| Laser Cartridge Yields (up to)[2] | 46,900-page Color (CMY) Cartridges, 47,700-page Black Cartridge | | | |
| Imaging Unit Estimated Yield | Up to 225,000 (black) and 250,000 (color) pages, based on 5 average letter/A4 size pages per print job and ~ 5% coverage | | | |
| Cartridge(s) Shipping with Product | 5,000-page Color (CMY) Toner Cartridges, 5,000-page Black Toner Cartridge | | | |
| Replacement Cartridges | Product functions only with replacement cartridges designed for use in a specific geographical region. See http://www.lexmark.com/regions for more details. | | | |

**SYSTEM SPECIFICATION**
Xerox® 9-Series
CX950/951/952/953 Color Multifunction Printers



| DEVICE INFORMATION | | | | |
|---|---|---|---|---|
| | **CX950** | **CX951** | **CX952** | **CX953** |
| Packaged Size (in. - H x W x D) | 42.5 x 29.1 x 30.9 in. | | | |
| Packaged Weight (lb.) | 225.5 lb. | | | |
| Size (in. - H x W x D) | 31.9 x 23.3 x 26.0 in. | | | |
| Weight (lb.) | 180.2 lb. | | | |
| Noise Level, Idle | 14 dBA | | 15 dBA | |
| Noise Level (Print), Operating | 44 dBA | 46 dBA | 50 dBA | 51 dBA |
| Duplex Print Noise Level, Operating | 45 dBA | 47 dBA | 51 dBA | 53 dBA |
| Noise Level (Copy), Operating | 49 dBA | 50 dBA | 57 dBA | 57 dBA |
| Noise Level (Scan), Operating | 55 dBA | 55 dBA | 58 dBA | 58 dBA |
| ENERGY STAR | Yes | | | |
| Average Power (Hibernate Mode) | 0.2 watts | | | |
| Average Power (Sleep Mode) | 0.9 watts | 1.0 watts | 0.84 watts | 0.84 watts |
| Average Power (Ready Mode) | 59 watts | 60 watts | 61.4 watts | 55.3 watts |
| Average Power (Printing) | 448 watts | 601 watts | 722 watts | 848 watts |
| ENERGY STAR Typical Electricity Consumption (TEC) | 0.41 kilowatt-hours per week | 0.55 kilowatt-hours per week | 0.7 kilowatt-hours per week | 0.82 kilowatt-hours per week |
| Product Certifications | ENERGY STAR, ICES-003 Class A, BSMI Class A, VCCI Class A, FCC Class A, NOM-032, UL, cUL, NOM, US FDA/CDRH, IEC 60825-1, CB Report, ISO-532B, CE (EU) DoC, EFTA (CE), KC/KCC Mark, RCM DoC, ErP - EcoDesign, CCC, UKCA DoC, Blue Angel/DE-UZ 219, CECP, CEL, ECMA-370, TED, SII, TER, UL-AR, GS Mark, ISO-9296, EPEAT Gold, Mopria Certified® | | | |
| Specified Operating Environment | Humidity: 15 to 80% Relative Humidity, Altitude: 0 - 2896 Meters (9,500 Feet), Temperature: 10 to 32.2°C (50 to 90°F) | | | |
| Country of Origin | North America & TAA Compliant - Mexico, Rest of World – PRC | | | |
| UNSPSC Code | 43212110 | | | |
| Harmonized Tariff Code | 8443.31.0000 | | | |

[1] Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.
[2] Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798.
[3] "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Xerox® printers and MFPs.
[4] "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Xerox product offerings based on the average number of pages customers plan to print on the device each month. Xerox recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage.

**SYSTEM SPECIFICATION**
Xerox® 9-Series
CX950/951/952/953 Color Multifunction Printers



For more information,
visit us at www.xerox.com/en-us/office.

© 2026 Xerox Corporation. All rights reserved. Xerox®, the Xerox logo, spark graphic and CentreWare® are trademarks of XRX Brandco LLC in the United States and/or other countries. The information in this brochure is subject to change without notice. 08/26 REF-1501858 BR43012 C95SS-05UA